

Quantum Communications with Compressed Decoherence Using Bright Squeezed Light

Fang-Yu Hong and Shi-Jie Xiong

National Laboratory of Solid State Microstructures and Department of Physics, Nanjing University, Nanjing 210093, China

(Dated: October 11, 2008)

We propose a scheme for long-distance distribution of quantum entanglement in which the entanglement between qubits at intermediate stations of the channel is established by using bright light pulses in squeezed states coupled to the qubits in cavities with a weak dispersive interaction. The fidelity of the entanglement between qubits at the neighbor stations (10 km apart from each other) obtained by postselection through the balanced homodyne detection of 7 dB squeezed pulses can reach $F = 0.99$ without using entanglement purification, at same time, the probability of successful generation of entanglement is 0.34.

PACS numbers: 03.67.HK, 03.67.Mn, 42.50.Pq

Keywords: squeezed state, quantum communication, homodyne detection

Quantum communication holds promise for transmitting secure messages via quantum cryptography and for distributing quantum information [1], and is an essential element in the construction of quantum networks. The basic problem of quantum communication is to create nearly perfect entangled states between remote stations. Such entanglement can be used, for example, to perform an entanglement swap [2, 3], to faithfully transfer quantum states via quantum teleportation, and to implement secure quantum cryptography using the Ekert protocol [4]. At present, photonic channels are the only choice in the realistic scheme for quantum communication. However, the fidelity of entanglement between remote sites decreases exponentially with the length of the connecting channel because of optical absorption and other channel noise, which limits the range of direct quantum communication techniques [5]. To extend this range to longer distance remains a conceptual and technological challenge.

In principal, the exponential fidelity decay can be overcome by introducing intermediate quantum nodes and utilizing the so-called quantum repeater protocol [3]. In a repeater protocol, an entanglement is established over long distances by building a backbone of entangled pairs between closely spaced nodes. Performing an entanglement swap at each intermediate node leaves the outer two nodes entangled. Even though quantum operations are subject to errors, by incorporating entanglement purification [6, 7] at each step, in principle, the overall communication fidelity can be made very close to unity, with the communication time growing only polynomially with the transmission distance.

Nearly all of the existing schemes [8, 9, 10, 11, 12, 13, 14, 15] for quantum repeaters generating entanglement rely on single photon (or sub-photon coherence state) transmission between distant qubits. Although the heralded entanglement may have high initial fidelity, the high probability for the channel loss means that the probability of successful entanglement decreases exponentially with the distance between repeater stations and the communication rates will be very low. Loock *et al* [16, 17] have described a scheme which uses a bright coherence pulse instead of single photons as the mediator linking the remote nodes and has successful post-selection of about 36% of the pulse sent down the channel with initial

fidelity 0.77 in the post-selected entanglement.

Schemes for generation of entanglement between two qubits through squeezed lights have been suggested [18, 19, 20]. In this paper we describe a scheme for distributing entanglement based on dispersive light-matter interactions using bright 7 dB squeezed light pulses which have already been experimentally realized [21]. Squeezed lights with larger squeeze factor may be achieved through the approach proposed by Guzmán *et al* [22]. The fidelity of entanglement between the two qubits in neighbor nodes may be as high as 0.99, at the same time, the probability of successful postselection can reach 0.34. So this scheme may significantly enhance the quantum communication rates.

In general, a nonlinear element has to be introduced to implement long-distance quantum communication [16] in at least two possible ways. The first approach employs only linear transformations accompanied with a measurement-induced nonlinearity [23]. In the second method, a weak nonlinear gate, where the nonlinearity is efficiently enhanced with a sufficiently strong probe pulse, is used to supplement the linear gates [24]. This concept can be applied to quantum communication with a hybrid system based on optical-carrier waves and electron-spin signals. In our scheme, a bright probe pulse in squeezed state sequentially interacts with two electronic spins in cavities at neighboring repeater stations, so the postselection of entangled qubit pairs will be conditional upon the results of probe homodyne measurements. In our proposal the complication of purifying an atomic ensemble [11] can be avoided and the entanglement from several copies of noisy entangled pairs of electronic spins may be directly distilled.

A qubit may be naturally realized through electron spins such as single electrons trapped in quantum dots [25] and neutral donor impurities in semiconductors [26, 27]. The system should be placed in a high-Q cavity resonant with the light to have a sufficiently weak dispersive interaction between the electron and the light. For the cavity, a weak coupling is sufficient [17, 29].

The mechanism for the entanglement distribution among the neighboring stations in the channel is shown in Fig. 1. The system in the cavity is treated as a Λ system, with two stable or metastable ground states $|0\rangle$ and $|1\rangle$, and only $|1\rangle$ takes part in

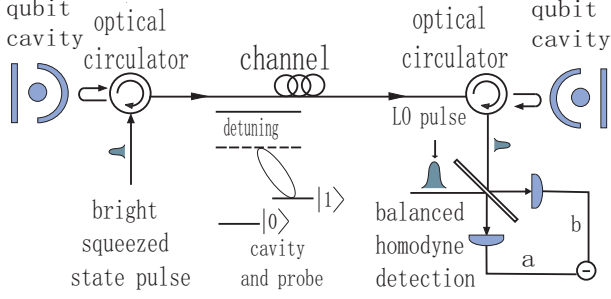


FIG. 1: (Color online) Schematic diagram showing the generation of spin entanglement between two qubits at neighboring nodes via homodyne detection discriminating among conditionally phased-rotated squeezed states of probe pulses. The local (LO) pulse for the homodyne detection is in a coherence state.

the interaction with the cavity mode. Local rotations between $|0\rangle$ and $|1\rangle$ may be manipulated via stimulated Raman transitions. Particularly, we assume that the states of the qubits in the neighboring nodes are both in the state $(|0\rangle + |1\rangle)/\sqrt{2}$. The probe pulse is sufficiently detuned from the transition between $|1\rangle$ and the exited state to guaranty a strictly weak dispersive light-matter interaction.

The probe beam is in a squeezed state $|\alpha, \varepsilon\rangle$ defined as [28]

$$|\alpha, \varepsilon\rangle = e^{i\alpha a^\dagger - \alpha^* a} e^{\frac{1}{2}\varepsilon^* a^2 - \frac{1}{2}\varepsilon a^{\dagger 2}} |0\rangle, \quad (1)$$

where a is the annihilation operator of a quantum field mode, α is an arbitrary complex number, and $\varepsilon = re^{2i\phi}$ with r being the squeeze factor.

We assume that α is real and $\varepsilon = re^{i\pi}$ hereafter. When the probe beam in the squeezed state $|\alpha, \varepsilon\rangle$ reflects from the cavity, the total output state may be described by [29]

$$\hat{U}_{int}[(|0\rangle + |1\rangle)|\alpha, \varepsilon\rangle]/\sqrt{2} = (|0\rangle|\alpha, \varepsilon\rangle + |1\rangle|\alpha e^{-i\theta}, \varepsilon e^{-i2\theta}\rangle)/\sqrt{2}. \quad (2)$$

For semiconductor impurities and realistic cavity parameters, phase shifts of θ about 0.01 are achievable [16, 29]. The change in ε and the amplitude of α are extremely small and may be omitted because of the weak dispersive interaction between light and matter.

In the physical optic fiber, photon losses are inevitable, which results in the squeezed pulse to degrade. So in a long distance optic fiber communication with large losses, the transmittance $\eta^2 \ll 1$, there will be no advantage in communicating via squeezed states. Otherwise, a part of the noise reduction of the pulse can be conserved, and the pulse may be assumed in a squeezed state $|\alpha', \varepsilon'\rangle$ with effective parameters α' and $\varepsilon' = r'e^{i\pi}$. The effect of linear loss on a mode can be described by [30, 31, 32, 33, 34]

$$b = \eta a + \sqrt{1 - \eta^2} a_v, \quad (3)$$

where a_v is the annihilation operator of the vacuum state mode. Defining $b_2 = (b - b^\dagger)/i$, from equation (3), we have

$$\langle b \rangle = \eta \alpha = \alpha', \quad (4)$$

$$\langle \Delta b_2^2 \rangle = \eta^2 e^{-r} + (1 - \eta^2) = e^{-r'}, \quad (5)$$

where $\langle \rangle$ indicates an expectation values for the squeezed state $|\eta\alpha, \varepsilon'\rangle$. When the light pulses propagate in the optic fiber, the lost photons are immediately lost, and the subspace of the lossy mode may be assumed to be in vacuum at all times (Born approximation) [17]. The pulse in the fiber can be expressed as $|\eta\alpha, \varepsilon'\rangle \otimes |0\rangle_l$, where the subscript l denotes lost photons. Thus, tracing over the lost photons will not result in new decoherence, and the decoherence from the photon loss in the channel have been embodied in the reduction of the parameters of the pulses.

At node 2, considering the decoherence from cavity losses and spontaneous emission during the light-matter interaction, the system composed of the pulses and the atom in the node 1 can be described by

$$\begin{aligned} \rho = & |0\rangle\langle 0| \eta\alpha, \varepsilon' \langle \eta\alpha, \varepsilon' | \langle 0| + |1\rangle\langle 1| \eta\alpha e^{-i\theta}, \varepsilon' e^{-i2\theta} \langle \eta\alpha e^{-i\theta}, \varepsilon' e^{-i2\theta} | \langle 1| \\ & + \zeta |0\rangle\langle 0| \eta\alpha, \varepsilon' \langle \eta\alpha e^{-i\theta}, \varepsilon' e^{-i2\theta} | \langle 1| \\ & + \zeta |1\rangle\langle 1| \eta\alpha e^{-i\theta}, \varepsilon' e^{-i2\theta} \langle \eta\alpha, \varepsilon' | \langle 0| \end{aligned} \quad (6)$$

where ζ describes the decoherence arising from the dispersive light matter interaction [29] and the lost mode of photons has been traced over.

Because at the second node, the parameters of the probe pulses α and ε decrease to $\eta\alpha$ and ε' , respectively. Then the phase shift of α due to the dispersive light-matter interaction in the second cavity will be smaller than that acquired in the first node, if other parameters of the interaction are the same as those in the first one. This problem, however, can be overcome by setting the atom-cavity coupling factor g at the second node to be larger than that at the first node.

We adopt a linear phase shift of θ to component $\eta\alpha$ of the probe state after it leaves node 2, which will result in a corresponding phase shift 2θ to ε' (see the following discussions). Because in the homodyne detection, only the pulses described by $|\eta\alpha, \varepsilon'\rangle$, $|\eta\alpha e^{i\theta}, \varepsilon' e^{i2\theta}\rangle$, and $|\eta\alpha e^{-i\theta}, \varepsilon' e^{-i2\theta}\rangle$ can appear, we only need to consider the diagonal elements of the total density matrix for the probe beams, which have the form

$$\begin{aligned} \rho_{dia} = & \frac{1}{4} |00\rangle \cdot \langle 00| \cdot |\eta\alpha e^{i\theta}, \varepsilon' e^{i2\theta}\rangle \langle \eta\alpha e^{i\theta}, \varepsilon' e^{i2\theta}| + \\ & \frac{1}{4} |11\rangle \langle 11| \cdot |\eta\alpha e^{-i\theta}, \varepsilon' e^{-i2\theta}\rangle \langle \eta\alpha e^{-i\theta}, \varepsilon' e^{-i2\theta}| \\ & + \frac{1}{2} \rho_{en} \cdot |\eta\alpha, \varepsilon'\rangle \langle \eta\alpha, \varepsilon'|, \end{aligned} \quad (7)$$

where

$$\rho_{en} = \frac{1}{2} (|01\rangle \langle 01| + \zeta |01\rangle \langle 10| + \zeta |10\rangle \langle 01| + |10\rangle \langle 10|). \quad (8)$$

The Wigner function for a squeezed state $|\alpha, \varepsilon\rangle = \frac{1}{2}(X_1 + X_2, r)$ [28] is

$$W(x'_1, x'_2) = \frac{2}{\pi} \exp \left[-\frac{1}{2} (x_1'^2 e^{-2r} + x_2'^2 e^{2r}) \right], \quad (9)$$

where $x'_i = x_i - X_i$ ($i = 1, 2$). Since $\theta < 0.01$ rad, we may neglect the effect of the phase shift $\pm 2\theta$ of the squeeze parameter ε' . Through the balanced homodyne detection of p quadrature of the squeezed pulse [35], the success probability of generating entanglement between two qubits in two neighbor nodes is found to be

$$P_s = \text{Tr} \int_{-p_c}^{p_c} \rho dx_2 = \frac{\text{erf}(b_0)}{2} + \frac{\text{erf}(b_1)}{4} + \frac{\text{erf}(b_{-1})}{4}, \quad (10)$$

where $b_s = \sqrt{2}(p_c + s\eta d) \exp(\varepsilon_1)$, $s = 0, \pm 1$, $d = \alpha \sin \theta$, $\text{erf}(t) = \frac{2}{\sqrt{\pi}} \int_0^t e^{-x^2} dx$, and p_c is the selection window of the homodyne measurement. The average fidelity after postselection has the form

$$F = \frac{1}{P_s} \left[\int_{-p_c}^{p_c} dx_2 \langle \psi^+ | \rho | \psi^+ \rangle \right] = \frac{\text{erf}(b_0)(1 + \zeta)}{2\text{erf}(b_0) + \text{erf}(b_1) + \text{erf}(b_{-1})}, \quad (11)$$

with the desired entangled output state $|\psi^+\rangle = (|01\rangle + |10\rangle)/\sqrt{2}$.

For optical fibers and wavelengths of visual light, the loss is about 0.17dB/km and the transmission parameter in a length of 10 km is $\eta^2 = 2/3$ [16]. 7 dB squeezed lights have a corresponding squeeze factor $r = 1.61$. From equation (5), we have $r' = 0.511$. Setting $\alpha = 150$, $\theta = 0.00867$ rad, $d = 1.30$, and $\zeta = 0.995$ [29], according to equations (10, 11), we have the success probability $P_s = 0.344$, and the average fidelity $F = 0.989$ for the selection window $p_c = 0.3$. The dependence of the success probability P_s and the average fidelity F on the selection window P_c are shown in Fig.2(a) and Fig.2(b), respectively. From Fig. 2, we see that the success probability P_s increases, however, due to the lack of orthogonality in the squeezed bases, the average fidelity F decreases, when we choose a larger selection window p_c . Thus a compromise between the success probability P_s and the average fidelity F has to be made [16].

Now we discuss the linear phase shifter for the squeezed state. When a squeezed state light s and another very strong reference light t pass through a Kerr medium at the same time, in which the interaction between the two beams is described by [35]

$$H_{in} = \hbar \chi a_s^\dagger a_s a_t^\dagger a_t, \quad (12)$$

where χ is a coupling constant dependent on the third-order non-linear susceptibility for the optical Kerr effect, we can find

$$a_s(t) = e^{i\chi A_t t} a_s(0) \equiv e^{i\theta(t)} a_s(0), \quad (13)$$

where $A_t = a_t^\dagger a_t$ is a constant of motion. Thus we have

$$\langle \alpha, \varepsilon | a_s(t) | \alpha, \varepsilon \rangle = e^{-i\theta(t)} \langle \alpha, \varepsilon | a_s(0) | \alpha, \varepsilon \rangle = e^{-i\theta(t)} \alpha, \quad (14)$$

and [36]

$$\begin{aligned} \langle \Delta N(t) \rangle^2 &= \langle \Delta N(0) \rangle^2 = 2 \sinh^2 r \cosh^2 r \\ &+ |\alpha|^2 [e^{-2r} \cos^2(\theta - \phi) + e^{2r} \sin^2(\theta - \phi)]. \end{aligned} \quad (15)$$

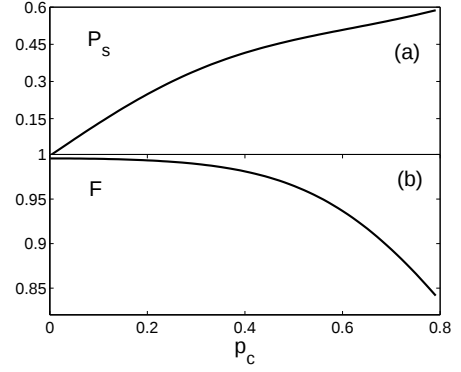


FIG. 2: The success probability P_s of successful generation of entanglement (a) and the average fidelity F of the obtained entanglement between two qubits in neighboring nodes (b) as a function of the postselection window p_c for $\eta^2 = 2/3$, $\alpha = 150$, $\varepsilon = 1.61$, $\theta = 0.00867$ rad, $d = 1.30$, and $\zeta = 0.995$.

where $\langle \rangle$ indicates an expectation value for the squeezed state $|\alpha, \varepsilon\rangle$. By this way a linear phase shift of θ and 2θ have been applied to α and ε , respectively. Large phase shifts may be possible in some solid-state systems such as Fullerene quantum dots which have a very large electric dipole moment and couple strongly to the electric field [37].

In conclusion, we present a scheme for distributing entanglement between qubits at remote stations in which the entanglement between qubits is generated by using a bright light pulse in the squeezed state. Together with a high success probability, the average fidelity of the obtained entanglement between qubits at the neighboring stations which are 10 km apart from each other may reach near unity without entanglement purification. This scheme, combined with protocols for entanglement purification and swapping such as the protocol suggested by [13], may be a promising candidate for the quantum repeaters. It may considerably increase the rates of quantum communications.

Acknowledgments This work was supported by the State Key Programs for Basic Research of China (2005CB623605 and 2006CB921803), and by National Foundation of Natural Science in China Grant Nos. 10474033 and 60676056.

-
- [1] G. Chiribella, L. Maccone, and P. Perinotti, Phys. Rev. Lett. **98**, 120501 (2007).
 - [2] W. Dür *et al.*, Phys. Rev. A **59**, 169 (1999).
 - [3] H.J. Briegel, W. Dur, J.I. Cirac, and P. Zoller, Phys. Rev. Lett. **81**, 5932 (1998).
 - [4] A. Ekert, Phys. Rev. Lett. **67**, 661 (1991)
 - [5] G. Brassard, N. Lutkenhaus, T. Mor, and B.C. Sanders, Phys. Rev. Lett. **85**, 1330 (2000)
 - [6] C. Bennett *et al.*, Phys. Rev. Lett. **76**, 722 (1996).
 - [7] D. Deutsch *et al.*, Phys. Rev. Lett. **77**, 2818 (1996).
 - [8] J.I. Cirac, P. Zoller, H.J. Kimble, and H. Mabuchi, Phys. Rev. Lett. **78**, 3221 (1997).

- [9] W. Yao, R.-B. Liu, and L.J. Sham, Phys. Rev. Lett. **95**, 030504 (2005).
- [10] B. Kraus, and J.I. Cirac, Phys. Rev. Lett. **92**, 013602 (2004).
- [11] L.-M. Duan, M.D. Lukin, J.I. Cirac, and P. Zoller, Nature **414**, 413 (2001).
- [12] L. Childress, J.M. Taylor, A.S. Sørensen, and M.D. Lukin, Phys. Rev. A **72**, 52330 (2005).
- [13] L. Childress, J.M. Taylor, A.S. Sørensen, and M.D. Lukin, Phys. Rev. Lett. **96**, 070504 (2006).
- [14] E. Waks, and J. Vuckovic, Phys. Rev. Lett. **96**, 153601 (2006).
- [15] L.-M. Duan, and H.J. Kimble, Phys. Rev. Lett. **92**, 127902 (2004).
- [16] P. van Loock, T.D. Ladd, K. Sanaka, F. Yamaguchi, K. Nemoto, W.J. Munro, and Y. Yamamoto, Phys. Rev. Lett. **96**, 240501 (2006).
- [17] T.D. Ladd, P. van Loock, K. Nemoto, W.J. Munro, and Y. Yamamoto, New J. Phys. **8**, 184 (2006).
- [18] W. Son, M.S. Kim, J. Lee, and D. Ahn, J. Mod. Opt. **49**, 1739 (2002).
- [19] M. Paternostro, W. Son, and M.S. Kim, Phys. Rev. Lett. **92**, 197901 (2004).
- [20] B. Kraus and J.I. Cirac, Phys. Rev. Lett. **92**, 013602 (2004).
- [21] P.K. Lam, T.C. Ralph, B.C. Buchler, D.E. McClelland, H.-A. Bachor, and J. Gao, J. Opt. B **1**, 469 (1999).
- [22] R. Guzmán, J.C. Retamal, E. Solano, and N. Zagury, Phys. Rev. Lett. **96**, 010502 (2006).
- [23] E. Knill, R. Laflamme, and G.J. Milburn, Nature **409**, 46 (2001).
- [24] K. Nemoto, and W.J. Munro, Phys. Rev. Lett. **93**, 250502 (2004).
- [25] A.S. Bracker *et al.*, Phys. Rev. Lett. **94**, 047402 (2005).
- [26] S. Strauf *et al.*, Phys. Rev. Lett. **89**, 177403 (2002).
- [27] K.-M.C. Fu *et al.*, Phys. Rev. B **69**, 125306 (2004).
- [28] D.F. Wall, and G.J. Milburn, *Quantum Optics*, Springer-Verlag, Berlin, 1995.
- [29] F.-Y. Hong, and S.-J. Xiong arXiv:quant-ph/0804.0720v2.
- [30] H.P. Yuen, arXiv:quant-ph/0109054v1.
- [31] H.P. Yuen and J.H. Shapiro, IEEE Trans. Inform. Theory. **24**, 657 (1978).
- [32] R.E. Slusher and B. Yurke, J. Lightwave Technol. **8**, 466 (1990).
- [33] H.P. Yuen, "Quantum Communication, Quantum Measurement, TCS and QND" in *Quantum Optics, Experimental Gravity, and Measurement Theory*, ed. P. Meystre and M.O. Scully, Plenum, pp.249-268, 1983.
- [34] H.P. Yuen, "Nonclassical Light" in *Photons and Quantum Fluctuations*, ed. E.R. Pike and H. Walther, Adam Hilger, pp.1-9, 1988.
- [35] M.O. Scully, and M.S. Zubairy, *Quantum Optics*, Cambridge, 1997.
- [36] M. Orszag 2000 *Quantum Optics* (Berlin: Springer-Verlag).
- [37] T.P. Spiller, K. Nemoto, S.L. Braunstein, W.J. Munro, P. van Loock, and G.J. Milburn, New J. Phys. **8**, 30 (2006).